

UniCool

Variable Speed Package Air Conditioner for Computer & Equipment Environment
Capacity: 3.6kW-39kW



A low-angle, upward-looking photograph of several tall, complex metal lattice towers against a clear blue sky. The towers are made of dark metal and feature various antennas, satellite dishes, and structural elements. The perspective creates a sense of height and scale.

Product Overview

UniCool - second generation Wall Package Unit is a variable speed air conditioner with integrated free cooling (economizer), which is a high efficiency cooling product of AIRSYS solutions, designed primarily for electronic and mechanical equipment shelters, container data center, E-Houses.

UniCool has been serving worldwide sites with over 15 years' experience in being a reliable friend of IT facilities. It is designed to safely work across a range of operating conditions, with high efficiency, green refrigerant, various power supply and installation arrangements.

In this era of huge data generating and flowing to every corner, UniCool units are going to wherever bits and bytes are blazing with the enhanced design combining yesterday's experience and today's innovation.

Unit Identification

01	02	03	04	05	06	07	08	09	10	11
11	V	1	T3	M	R410	A	AC	x	x	x

01	11	Nominal kW. Total Cooling Capacity
02	V	Compressor Type: V: Variable Capacity
03	1	Compressor Qty 1: 1 Variable Capacity Compressor 2: 1 Variable Capacity Compressor + 1 Fixed Capacity Compressor
04	T3	Mechanical Package Code B: Bottom Supply Package T: Top Supply Package The number following "B" or "T" denotes package size. See mechanical drawing for detail.
05	M	Design Control Configuration S: Single Controller with PGD M: Designed for Multiple Unit Control
06	R410	Refrigerant R410: R410a Refrigerant
07	A	Primary Power Supply A: 208/230V/220V 1PH 50/60Hz B: 208/230V 3PH 60Hz C: 460V 3PH 60Hz D: 380V 3PH 50Hz
08	AC	Supply Fan Power AC: AC Powered EC Fan DC: DC Powered EC Fan
09	X	Custom Color X: Mesa Tan (Default) G: Light Gray B: Matte Black
10	X	Custom Coating X: Polyurethane Coated Panel and Frame + Coated Evaporator Coil (Default) C: Option X + Blygold Condenser Coil Coating+ Stainless Steel Fasteners E: Option C + Stainless Steel Panel and Frame
11	X	Custom Filters X: MERV 8 (G4) (Default) 1: MERV 11 (F5) 2: MERV 13 (F7)

For Example:

11V1B3SR410AAC stands for a UniCool unit with bottom air supply, 11kW nominal cooling capacity, equipped with one variable speed compressor, package size B3, single control, R410a refrigerant, the power supply is 230V/1P/60Hz, and the supply fan is an AC-powered EC centrifugal fan.

Note: *If multi control units are ordered, one or more multi-unit control boxes are required.

How to Select the Model

Instructions for Choosing the Unit Type

1	System Heat Load:				
2	Refrigerant:	R410a			
3	Operating Conditions:	Cooling rated at 95°F(35°C) outdoor and 80°/67°F(26.7/19.4°C) indoor @AHRI 390			
	Cooling Capacity	7kW	11kW	15kW	28kW
4	Cabinet Size	B2/T2	B3/T3	B4/T4	B5
	Compressor Type	Rotoary	Scroll	Scroll	Scroll
		220V/1Ph/50Hz	●	●	●
		380V/3Ph/50Hz		○	●
5	Power Supply:	(208~230)V/1Ph/60Hz	●	●	●
		(208~230)V/3Ph/60Hz		●	●
		460V/3Ph/60Hz		○	●
6	Supply Fan:	Standard: AC Power EC Fan. Optional: DC Power EC Fan.			
7	Color:	Standard: Grey, Gold Optional: Black, White.			
8	Controller Location	Built-in Controller + PGD Display External Controller Box for Multiple Control			
9	Controller Configuration	Controller Type, Communication Card, Clock Card, Damper Actuator, Temperature and Humidity Sensor, Smoke/ Fire Alarm, Clog-in Filter Alarm, AFD Dust Sensor, Air Filter, Dehumidification, Dry Contact Qty, etc.			

3-phase electricity is applicable to the B4 cabinet, the T4 cabinet requires non-standard design.

As an international supplier of ICT refrigeration solutions, AIRSYS takes into consideration global variations in power supplies. As shown in the table above a variety of alternative power supply options are available to meet the needs of users in different regions.

Working Range & Control Accuracy

Indoor:

Temp. range & accuracy: 62°F ~ 97°F ±1.8°F
(18°C~35°C±1°C)

Outdoor:

Standard configuration: -22°F ~ 115°F, up to 131°F
(-30°C~46°C, up to 55°C)

Storage:

Temp.: -40°F ~ 158°F (-40°C~70°C)
Humidity: 5~95%

Applications

Telecommunication base stations
High-tech electronic device rooms
Power distribution stations
Industrial process control center
Container data center
Energy storage cabinet

Controller

Variable Controller Options for Different Demands

Build-in VS External

The 'Built-in Controller + PGD Displayer' combination is the most common and economic way to control and maintain the unit. It allows the air conditioners to work independently or cooperate with each other.

External controller with individual power supply provides availability when air conditioner fails and it's indoor installation reduces inconvenience to maintain or fix the unit from outside. Both 'Built-in Controller' and 'External Controller Box for Multiple Control' option provides possibility to have two or more units work together and realize Lead/Lag control.

Standard Controller Components

- Controller platform
- Supply and return air temperature sensor
- Outdoor temperature sensor
- Humidity sensor
- Clock and calendar display
- RS485 with MODBUS RTU communication protocol
- PGD display: 6-keys keyboard can display graphical images and text



ASMUC Multiple Control Box

Units	Model of Multiple Control Box
Units with AC power supply	ASMUC.6.AC
Units with DC power supply	ASMUC.6.DC



Advanced Technology & Classic Design

1 Energy Saving

- Integrated with free cooling system, saving up to 90% of the energy requirements
- VFD technology - Variable speed compressor
- EC supply fan
- Auto-control optimizes system performance

3 Intelligent Control

With the 'mind' given to it, it can conduct self-diagnosis, react and cope with various situations, communicate with user and other units and deliver prominent energy efficiency.

4 Safety Operation

Highly safety performance guaranteed by functions and protections designed for the unit.

2 Reliability

- 24*7 uninterruptible operation design
- 15 years of global market verification
- Up to 50k units presenting and performing their abilities at different sites of the world
- Overcome locational and environmental constraints
- Classic line with low failure rate

5 Easy Installation & Maintenance

- Outdoor Wall-mounted Package Design- no interior space is required.
- Plug-in wiring connection and easy removable components
- Accessible component easy to maintenance
- Lockable server breaker access- service safety
- Designed for easy lifting

Energy Saving










Free Cooling System

Energy-saving Operation

Each unit is equipped with both mechanical cooling system and free cooling system as standard. The fresh air free cooling is designed to be the primary source of cooling.

When the outdoor and indoor temperature difference meets the free cooling requirement (2°C default, adjustable), the free cooling system will automatically bring in outside air to the room and stop the mechanical cooling system, therefore reducing power consumption.

When the temperature difference between indoor and outdoor is higher than 10°C, the free cooling system can supply 100% of the cooling capacity, saving up to 90% of the energy requirements.

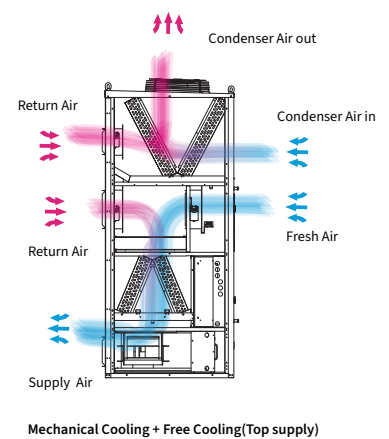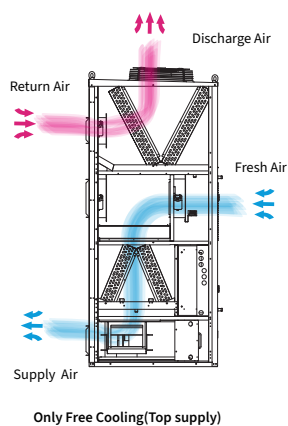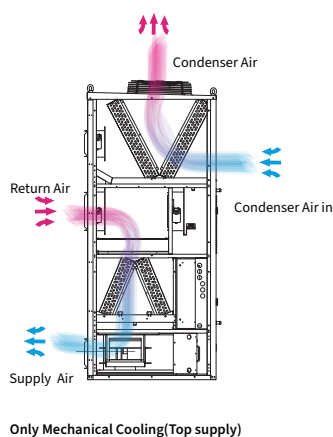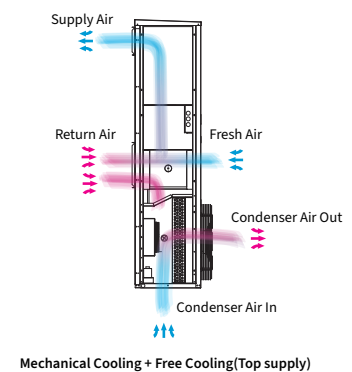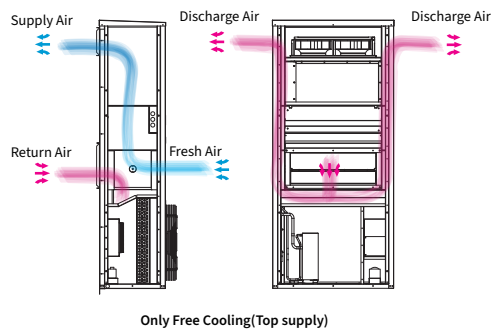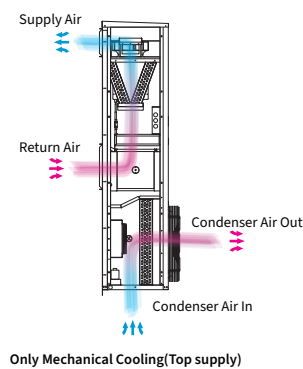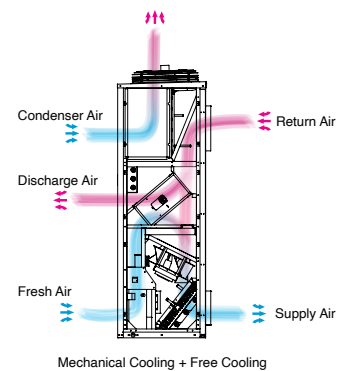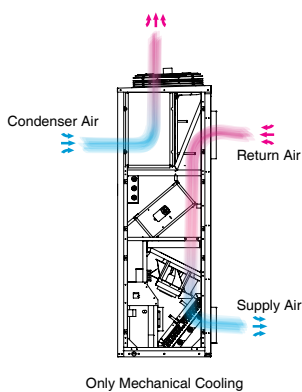



Auto-control Optimizes System Performance

Flexible Function- Humidity Limitation

This Humidity limitation function can be enabled or disabled on site.

If it is enabled, when the humidity is higher than the setpoint, free cooling will be turned off in order to stabilize the inside humidity within the base station.

Flexible Function- Air Filter Protection

With AIRSYS patented product- Air filter protection device (AFPD), free cooling can be disabled automatically in harsh environments such as sand storms, dust and other adverse weather conditions to protect the filter which reduces both service costs and energy consumption.




VFD Technology

Precise Heat Load Match

Just like an airplane experiences most of its stress during takeoff and landing, loading, and unloading between stages of cooling introduces most of the mechanical stress on the compressor. The turn on of a fixed compressor wears down contactors and the resulting inrush current wears down other electronics. Even for properly sized units and properly set minimum compressor run/stop timer, the loading and unloading can reach one hundred times a day which would be > 30,000+ times per year.


By precisely always matching the heat load, the Variable Capacity units minimizes sudden loading and unloading of the compressor, vastly extending the life and reliability of the entire cooling system.

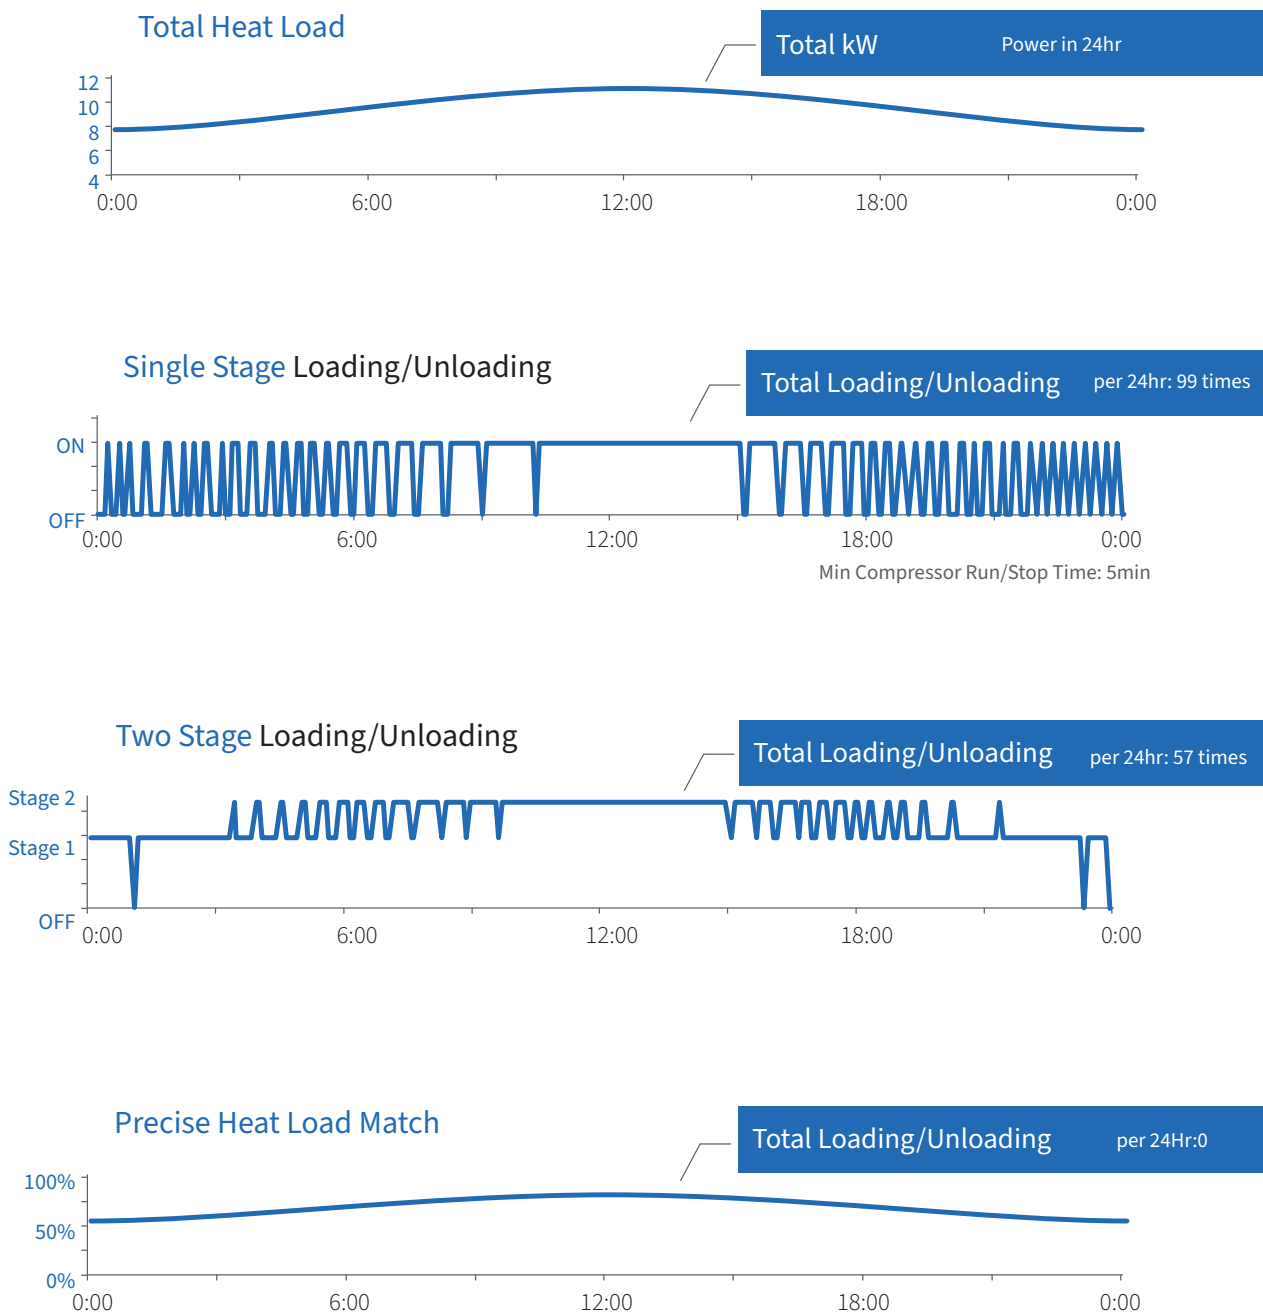

Compressor

Synchronized Cooling Mode

With variable capacity systems, buildings with one or more redundant HVAC units can use Synchronized Cooling Mode, which allows any building with redundant units to achieve 14-16 EER while maintaining full redundancy except during emergency situations.

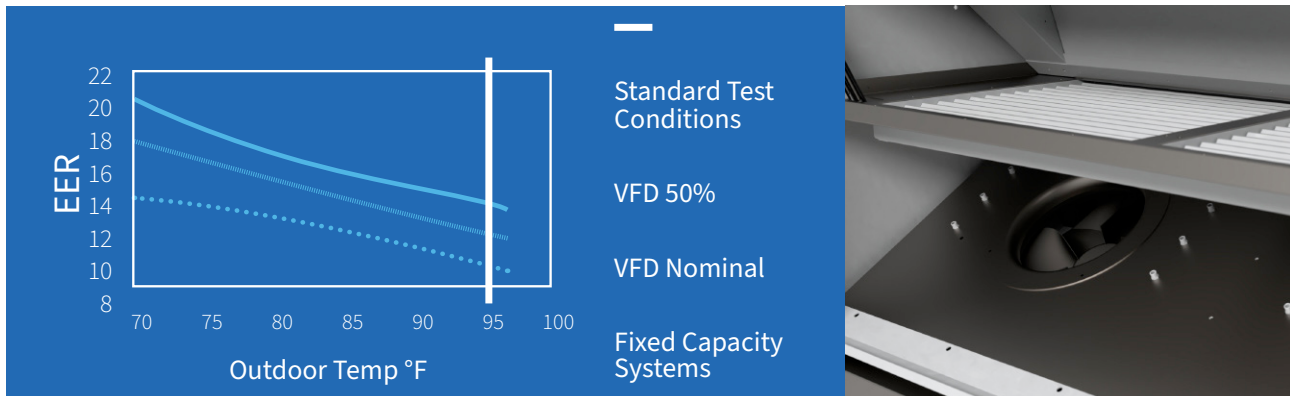

Turbo Boost Mode

In some situations, such as extreme high outdoor temperature, or increased equipment load, the heat load of the building may exceed the nominal cooling capacity of the HVAC system. When this happens, Turbo Boost Mode can be engaged automatically to deliver up to 125% of the nominal cooling capacity at the expense of slightly lower efficiency.

Soft Start

Instead of sudden and numerous starts and stops, the variable compressor will ramp up capacity at startup and continuously modulate capacity to match the load of the shelter. This means generators no longer need to be sized to Locked Rotor Amps and a smaller generator and transfer switch system can be used. Soft start has the following advantages:

- Minimizes mechanical stress during the start-up of the compressor
- Eliminate spike voltage on start-up
- Reduced noise from sudden compressor loading



EC Fan


An EC fan refers to a centrifugal fan that utilizes an Electronically Commutated motor (or brushless DC motor).

EC fans have numerous benefits including:

Energy Efficiency

EC fans have brushless DC motors and integrated control modules. Motor efficiencies of 85-90% are achievable; 30% to 50% higher than traditional AC fans.

The difference in energy efficiency between variable speed EC fan control and traditional on/off fixed speed AC fans can be seen in the graph; the bars show the power consumption of fans which are switched in gradually as required while the blue curve shows the power consumption with infinitely variable speed control.

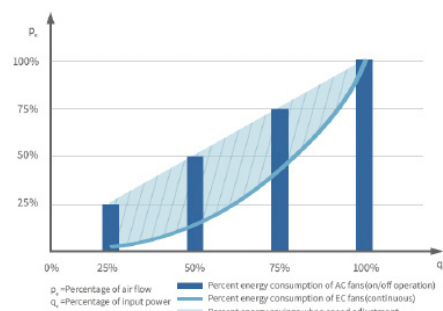


Lower Noise

In a given installation, switching off half the fans (and halving the air flow) will typically only reduce the generated noise by approximately 3 dB. Compare this to EC fans running at full speed, where reducing fan speed to provide half the air flow typically yields a reduction of approximately 15 dB. This is possible as EC fans are able to operate across an infinitely controllable speed range, which in turn effectively avoids electromagnetic and rectifier noise (generated by other traditional motor and speed control devices), thus reducing the overall noise level.


In the graph, the bars indicate the sound pressure level of fans which are switched in gradually as required and the blue curve shows the sound pressure level with infinitely variable speed control.

As can be seen from the picture EC fan sound pressure level is 12dB lower compared to the traditional AC fan.

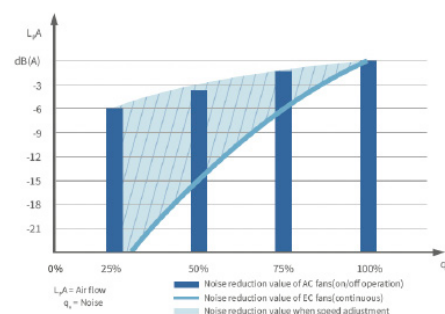

Compact, Integrated Electronic Control System

All EC fans have dedicated speed control modules and filters built into the motor assembly, making for a compact and self-contained solution. All that is required is to connect the main power supply and the sensor signals to the controller for complete speed control of between 10% and 100%. EC fans provide a simple, convenient solution and can also support group control and remote monitoring.



Wide Working Voltage

Wide AC input voltage range: 1~200-277VAC or 3~380-480VAC 50&60Hz

Wide DC input voltage range: 16-28VDC or 36-57VDC

Reliability

1 Expert in Wall Package Units

UniCool units have gone through 15 years of global market verification. Up to 50k units are presenting and performing their abilities at different sites of the world. Low failure rate and high reliability has earned UniCool units good reputation and made it the classic line in both Airsys and the market.

2 High Performance Components

EC Fan

When the pressure drop across the filter reaches 250Pa, the unit air flow will not be lower than 90% of design air flow at standard operating conditions.

Compressor

Highly reliable scroll compressors with more than 10 years lifespan.

Heat exchanger

Evaporator and condenser with high efficiency heat exchanging copper tube and enhanced aluminum fins which are also easy to clean.

High torque and low leakage air damper

The air filter is equipped with a high torque and low leakage air damper.

The time for opening and closing the damper is less than 35 seconds. The Air Leakage across the damper is less than 5% by volume of the air normally passing through the unit when a reverse pressure of 125 Pa is applied.

3 Wide Working Range

UniCool units combine precise temperature and humidity control with outstanding reliability and energy efficiency throughout 24*7 operation.

4 Environmental Resistance

Dual Layer Exterior Protection-Galvanized steel exterior coated with an additional layer of thermoset polymer provides two layers of protection against corrosion which can meet:

Mist resistance-1000 hours, no blistering and loss of light (ASTM D1735)

Water immersion resistance-240 hours, no blistering and loss of light (ASTM D870)

UV resistance-12 months outdoor exposure without powdering (GR487)

Salt spray test-500 hours (ISO 9227)

The treatment is sufficient to provide protection for 15 years life cycle for inland installation.

If necessary, the treatment for sea air environment can be supplied as an option.

5 Strong Structure supplied as an option

The standard unit framework is supplied with corrosion protection treatment.

The unit has passed a transportation test to confirm the structure is strong enough to be able to transport on low grade roadways.

6 24*7 Uninterruptible Operation

UniCool units combine precise temperature and humidity control with outstanding reliability and energy efficiency throughout 24*7 operation.



Easy Installation & Maintenance

Wall-Mounted Package Design

Outdoor Wall-mounted Package Design occupies no interior space and allows IT facilities to be deployed best to the space.

The design can significantly reduce installation workload and cost as no piping, brazing and leakage testing at site. Only easy wiring and wall opening are required.

The compact optimized structure design provides the possibility to be lifted by forklift instead of hoist. (28kW unit excepted).

Easy Maintenance

The main components such as compressors, fans, motors, dampers and other related items are all easily accessible and maintained from the front of the unit.

The weight of each panel is less than 10kg for ease of removal and reinstatement.

Service Port

Service ports are accessed without removing door assembly.

Lockable server breaker access

To guarantee service safety, circuit breaker door is hinged and lockable for tamper resistance.

Design for easy re-assembly

For maintenance-related parts, plug-in connections and easy removable components are applied.

Automatic Maintenance Sequential Test

A maintenance test facility is provided to enable an engineer to press/select one button that will activate a self- test routine.

The self-test routine will check for the satisfactory operation of the fresh air damper and the compressor refrigerant circuits.

This is achieved by applying a dummy return air temperature signal, slowly ramping up from a point below the system set point to a high temperature level thereby testing the damper operation (via changes in the supply temperature).

The system stops the supply fan for a controlled period, to simulate the low pressure of refrigeration system and to check if the low pressure protection working normally.

The system stops the condenser fan for a controlled period, to simulate the high pressure of refrigeration system and to check if the high pressure protection working normally.

Safety Operation



Emergency Ventilation Function

The emergency ventilation function can be enabled or disabled on site.

If it is enabled, the emergency ventilation function will be engaged once the room temperature exceeds the heat-protection setpoint for internal equipment. The emergency will be triggered at any time other than when fire/smoke alarm has been triggered.



Voltage Protection-Control Protection

There is a voltage relay for protection. When the supply voltage is over the permitted range, the unit will be stopped.

For 3 phase units, if there is phase unbalance or phase absence, the unit will also be stopped for protection.



Random Restart When Power Recovered

Once power has been restored (following an outage), the unit will restart automatically with a random time delay between 1 to 60 seconds to avoid multiple items of equipment starting at the same time.



Intelligent Control

1 Fully Automatic Control

The unit is equipped with a full automatic control system; all control, protection, alarm functions are automatic with auto-restart.

2 Working Mode Auto-Alternated

The unit automatically selects between mechanical cooling and free cooling modes. In the event of either electrical or mechanical failure affecting the refrigeration system, the unit will be capable of automatic reversion to the fresh air cooling mode.

3 Automatic Self-Diagnosis

All the components connected to microprocessor are continuously tested. In case of malfunction, the failure is shown on the display with relevant information.

4 4 Levels of Password Protection

There are 4 levels of password protection for the control system:

- **Read only:** for regular operation access
- **Read/write:** Suitable for maintenance personnel
- **Maintenance & commissioning:** Suitable for commissioning engineers
- **OEM:** Suitable for the engineer from manufacturer

5 Comfort Mode for Service Engineer and Technicians

When a service engineer is working in the base station, HVAC comfort mode (72°F/22°C, adjustable) can be selected by pressing 2 buttons on the user terminal.

6 Running Data Logging

The controller has a memory of 1M for data logging. If the interval of data logging is less than 5 minutes, the controller can store at least 48 hours working data.

Data output:

The RS485 communication card is standard configuration for the unit while pCOWeb card is optional which enable automatic download of logs. The format of the data should be CSV or Excel file.

7 Web Server Monitoring System

The unit can be equipped with a Web Server card with TCP/IP protocol and Ethernet network to realize remote control and monitoring. Each computer can be connected to the web server by Ethernet network and check the working status and control the unit in time everywhere. Lead-Lag auto alternated When lead or lag unit is failure, the lag or lead unit will work. Balance all units working time automatically If there are 2 units installed, the controller will alternate the working unit automatically according to the total working time of the units to balance the working time.

The control functions

Parameters Display

- Current control temperature set
- Return air temperature
- Outside air humidity
- Outside air temperature
- Supply air temperature
- Damper position
- Software version
- Attend mode

Working Status Display

- Supply fan speed
- Main fan hours run
- Main fan minimum speed hours run
- Condenser fan low speed
- Condenser fan low speed hours run
- Condenser fan high speed
- Condenser fan high speed hours run
- Compressor working status
- Compressor hours run
- Compressor startup times
- Compressor total startup times within latest 48 hours
- Free cooling startup times
- Heater working status
- Heater working hours
- Heater startup times
- Free cooling working status
- Free cooling working hours
- Free cooling startup times
- Unit general failure alarm

Alarm Display

- Controller failure
- High pressure
- Low pressure
- Supply fan failure
- Filter clogged
- Free cooling system failure
- Low temperature
- High temperature
- Fire or smoke
- Temperature sensor defective

Remote Control and Monitoring

The remote monitoring and control system can be easily connected with the units to realize remote real time monitoring and control and save the running data.


The unit can be remote controlled by many kinds of methods as follows:

4 kinds of wireless network connection with computer

3 kinds of local direct connection with computer

3 kinds of LAN network connection with computer

Networking Structure Chart

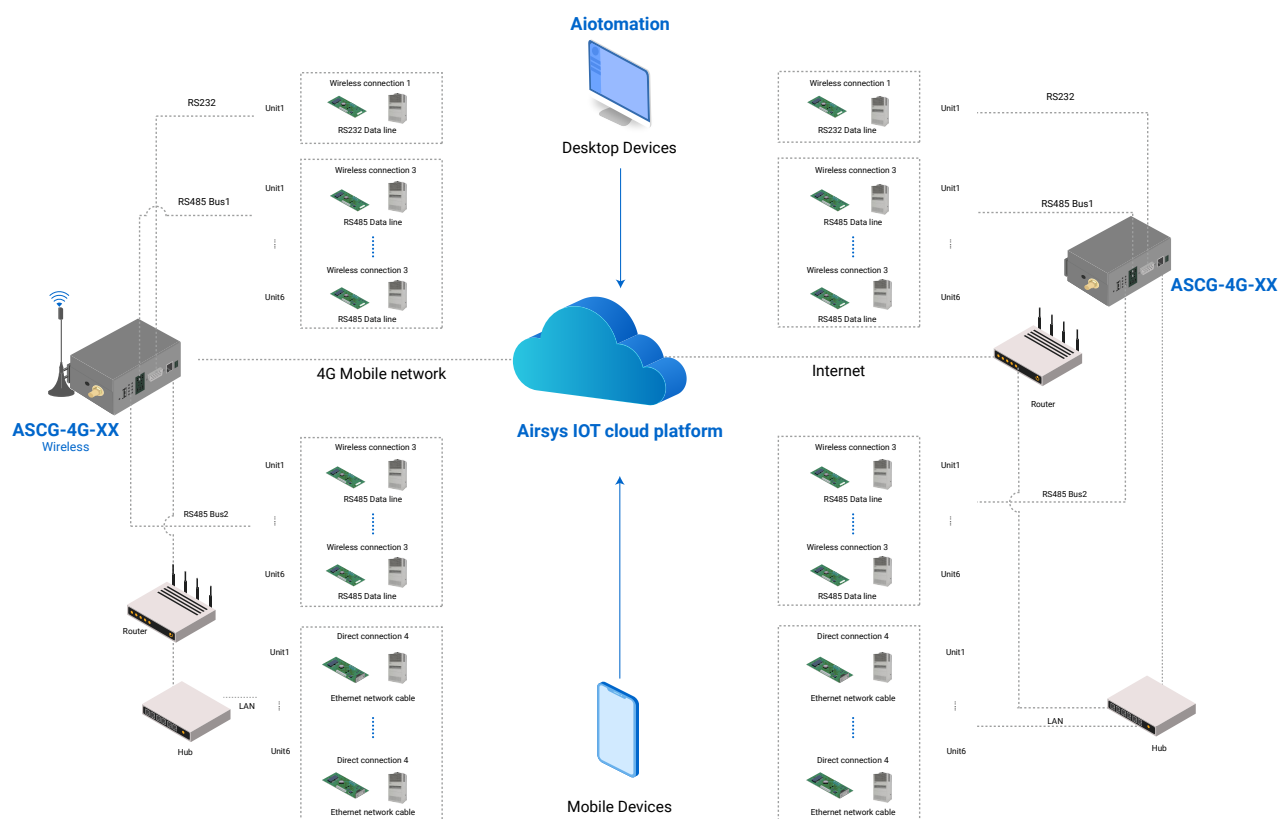

Nitoring and Control Method	Related Network Configuration	Farthest D
Wireless Network Connection		
Wireless connection 1: Wireless communication without unit server	RS485-TCP/IP converter; wireless router	No limitation
Wireless connection 2: Unit server based Wireless communication	Web server card; wireless router	No limitation
Wireless connection 3: Communication with remote computer by GSM mobile phone	GSM communication module	No limitation
Wireless connection 4: Communication with air conditioner directly by GSM mobile phone	GSM communication module; RS232 card	No limitation
Direct Cable Connection		
Direct connection 1: Direct connection by RS232 data line	RS232 communication card	1.5m
Direct connection 2: Direct connection by RS485 data line	RS485 communication card	1500m
Direct connection 3: Direct connection by Ethernet network line	Web server card	Can be extended by hub.
LAN Network Connection		
LAN connection 1: LAN network by multi-port protocol converter	RS485 communication card; Multi port RS485-TCP/IP protocol converter	Can be extended by hub.
LAN connection 2: LAN network by single port protocol converter	RS485 communication card; Single port RS485-TCP/IP protocol converter	1500m
LAN connection 3: LAN network by RS485-RS232 protocol converter	RS485 communication card; Single port RS232/ RS485 protocol converter	1500m

Standard Components

1 Unit Framework

The unit is made of folded galvanized steel exterior coated with an additional layer of thermoset polymer provides two layers of protection against corrosion.

2 Mechanical Cooling System

- Reliable compressor
- Filter dryer
- Thermodynamic expansion valve
- High efficiency evaporator / condenser coils
- Auto reset type reliable high/low pressure switch

3 Free Cooling System

- Air damper include
- Damper blade
- Damper actuator: 0~10V maximum~45S open or close time

4 Supply Fan

AC powered EC centrifugal fan.

5 Condenser Fan

IP54 axial propeller fan with directly coupled motor, internal thermal protection and external current protection.

6 Supply Air Temperature Sensor

A supply air temperature sensor installed in the mixing box can be used to control the position of the air damper.

7 Air Filter

G4 main air filter, 2" disposable pleated type. G2 nylon filter, at outside air inlet.

8 Build- in Controller

- Controller platform
- Supply and return air temperature sensor
- Outdoor temperature sensor
- Humidity sensor
- Clock and calendar display
- RS485 with MODBUS TCP/IP communication protocol
- pGD user terminal

9 Air Pressure Differential Switch

The filter clogged alarm will be triggered if the filter is clogged.

10 Wall Mounting Kits

The unit is designed to be installed hanging on the shelter wall and is enclosed with related mounting accessories such as: angle brackets, through wall bolts, sealing tape and supply and return grill etc.

Optional Components

1 External Control Box

- External Controller Box for single control
- External Controller Box for multiple Control

2 Filter Options

Main filter: F5/F7 washable/ disposable

3 Spring Loaded Damper Actuator

When there is power failure, the damper can be closed automatically within 20s.

4 Remote Communication Card

pCOWeb communication with SNMP, BACNET, Modbus485 TCP/IP Communication Protocol

5 Air Filter Protection Device

The AFPD has been developed to maximize the filter working life and enable free cooling to function in harsh environments such as sand storms, dust and other adverse weather conditions. This reduces both service costs and energy consumption.

6 Wider Operation Temperature Range

- High temperature up to 131°F (55°C)
- Low temperature down to -22°F(-30°C)

7 DC Powered EC Supply Fan

DC powered EC fans can be chosen to keep free cooling function and emergency ventilation when AC power failure

8 Coastal Environment Package

- Level 1: anti-corrosion coated condenser;
- Level 2: anti-corrosion coated condenser and corrosion resistant fasteners;
- Level 3: anti-corrosion coated condenser, corrosion resistant fasteners and whole stainless steel cabinet (customized option).

9 Dehumidification Function

- Indoor humidity sensor
- Electric heater

10 Color Option

- White
- Black



Unit Specification

60Hz

Unit Model		UNI.7V1B2.AC	UNI.7V1B2.DC	UNI.11V1T3.AC	UNI.11V1T3.DC	UNI.11V1B3.AC
Air Flow		DL	DL	O	O	DL
Power Supply						
Power Source		230V/1PH/60Hz				
Max Input Power	kW	5.4	5.1	5.5	5.1	5.4
Rated Power 1#	kW	2.14	2.08	3.03	2.85	3.06
Rated Current 1#	A	9.3	9.0	13.2	12.4	13.3
Rated Power 2#	kW	/	0.2	/	0.5	/
Rated Current 2#	A	/	3.5	/	9.8	/
Mca 1#	A	28.7	27.2	29.3	27.2	29.0
Mop 1#	A	30	30	40	40	40
Mca 2#	A	/	6.3	/	9.9	/
Mop 2#	A	/	10	/	15	/
Performance						
Total Capacity (1)	Btu/h	24,600	24,600	34,800	35,800	35,200
	kW	7.2	7.2	10.2	10.5	10.3
Sensible Capacity (1)	Btu/h	20,600	20,400	29,000	30,200	29,000
	kW	6.0	6.0	8.5	8.9	8.5
Sensible Heat Ratio (1)		84%	83%	83%	84%	82%
EER (1)	(Btu/h)/W	11.5	11.4	11.5	11.5	11.5
	W/W	3.37	3.35	3.37	3.36	3.37
IEER	(Btu/h)/W	17.9	17.0	19.4	18.5	19.4
Max Cooling Capacity(2)	Btu/h	30,400	29,600	48,000	52,800	48,000
	kW	8.9	8.7	14.1	15.5	14.1
Max Sensible Capacity (2)	Btu/h	25,400	23,400	35,400	43,600	35,200
	kW	7.4	6.9	10.4	12.8	10.3
Min Cooling Capacity(3)	Btu/h	12,200	11,200	24,000	18,800	25,600
	kW	3.6	3.3	7.0	5.5	7.5
Min Sensible Capacity (3)	Btu/h	8,800	8,400	22,800	16,200	22,000
	kW	2.6	2.5	6.7	4.7	6.4
Free Cooling Capacity (4)	Btu	30,900	26,500	41,200	42,700	36,800
	kW	9.1	7.8	12.1	12.5	10.8
EER (4)	(Btu/h)/W	110.4	110.4	105.6	112.4	108.2
	W/W	32.3	32.4	31.0	32.9	31.7
Electric Heater						
Heating Capacity	Btu	17,000	17,000	17,000	17,000	17,000
	kW	5.0	5.0	5.0	5.0	5.0
Current	A	21.7	21.7	21.7	21.7	21.7
Compressor 1#						
Type		Rotary	Rotary	Scroll	Scroll	Scroll
Qty	N.	1	1	1	1	1
Power Input (1)	kW	1.73	1.75	2.18	2.15	2.21
Current Input (1)	A	7.5	7.6	9.5	9.3	9.6
Power Input (2)	kW	2.07	2.07	4.1	4.3	4.1
Current Input (2)	A	9.0	9.0	17.8	18.7	17.8
Compressor 2#						
Type		/	/	/	/	/
Qty	N.	/	/	/	/	/
Power Input (1)	kW	/	/	/	/	/
Current Input (1)	A	/	/	/	/	/
Evaporator Fan						
Type		EC Centrifugal Fan				
Qty	N.	1	1	1	2	1
Power Input(1)	kW	0.18	0.17	0.39	0.37	0.34

Unit Model		UNI.7V1B2.AC	UNI.7V1B2.DC	UNI.11V1T3.AC	UNI.11V1T3.DC	UNI.11V1B3.AC
Current Input(1)	A	0.8	3.5	1.7	7.7	1.5
Air Volume(1)	CFM	1,110	940	1,640	1,640	1,470
	m³/h	1,900	1,600	2,800	2,800	2,500
Power Input(2)	kW	0.28	0.24	0.39	0.38	0.34
Current Input(2)	A	1.2	5.0	1.7	7.9	1.5
Air Volume(2)	CFM	1,230	1,050	1,640	1,700	1,470
	m³/h	2,100	1,800	2,800	2,900	2,500
Condenser Fan						
Type		Axial Fan				
Qty	N.	1	1	1	1	1
Power Input(1)	kW	0.23	0.23	0.46	0.60	0.51
Current Input(1)	A	1.0	1.0	2.0	2.6	2.2
Air Volume(1)	CFM	2,000	2,000	4,110	3,700	3,230
	m³/h	3,400	3,400	7,000	6,300	5,500
Power Input(2)	kW	0.26	0.26	0.46	0.60	0.62
Current Input(2)	A	1.1	1.1	2.0	2.6	2.7
Air Volume(2)	CFM	2,230	2,230	4,110	3,700	3,820
	m³/h	3,800	3,800	7,000	6,300	6,500
Refrigerant						
Type		R410A				
Qty 1#	kg	3.1	3.1	5.3	4.0	3.7
	oz	109.3	109.3	186.9	141.1	130.5
Qty 2#	kg	/	/	/	/	/
	oz	/	/	/	/	/
Air Filter						
Preliminary Air Filter (G2)	in	29.9*11.8*0.4	29.9*11.8*0.4	30.1*11.8*0.4	30.1*11.8*0.4	35.8*11.8*0.4
	n.	1	1	1	1	1
Main Air Filter (G4)	in	17.5**24.5**1.8"	17.5**24.5**1.8"	15.9**15.9**3.8"	15.9**15.9**3.8"	15.5*15.5*1.8
	n.	1	1	2	2	2
Dimensions						
Width	in	39 6/8	39 6/8	44 7/8	44 7/8	45 5/8
	mm	1010	1010	1141	1141	1159
Depth	in	27 8/16	27 4/8	26 13/16	26 3/4	27 1/2
	mm	698	698	680	680	698
Height	in	84	84	92 7/8	92 7/8	84 9/16
	mm	2134	2134	2360	2360	2148
Width (Package)	in	40 13/16	40 13/16	47 4/16	47 4/16	46 11/16
	mm	1036	1036	1200	1200	1186
Depth (Package)	in	28 4/16	28 4/16	30 5/16	30 5/16	29 8/16
	mm	718	718	740	740	720
Height (Package)	in	89 12/16	89 12/16	98 1/16	98 1/16	89 12/16
	mm	2280	2280	2490	2490	2280
Weight						
Weight	lbs	504	504	646	646	633
	kg	229	229	293	293	287
Weight (With Packaging)	lbs	558	558	690	690	686
	kg	253	253	313	313	311

(1) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Rated Capacity.

(2) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Max Capacity.

(3) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Min Capacity.

(4) Optional function. Measured at DT (Tinside-Toutside) = 21.6°F (-6°C).

Unit Model		UNI.11V1B3.DC	UNI.15V1T4.AC	UNI.15V1B4.AC	UNI.28V2B5.AC
Air Flow		DL	O	DL	DL
Power Supply					
Power Source		230V/1PH/60Hz			
Max Input Power	kW	5.1	7.9	7.6	15.7
Rated Power 1#	kW	2.88	4.60	4.48	4.73
Rated Current 1#	A	12.5	20.0	19.5	20.5
Rated Power 2#	kW	0.5	/	/	4.64
Rated Current 2#	A	9.6	/	/	20.2
Mca 1#	A	27.2	34.2	35.8	44.3
Mop 1#	A	40	50	50	60
Mca 2#	A	10.7	/	/	27.2
Mop 2#	A	15	/	/	35
Performance					
Total Capacity (1)	Btu/h	36,000	50,500	51,500	96,000
	kW	10.6	14.8	15.1	28.1
Sensible Capacity (1)	Btu/h	29,200	42,500	45,000	81,000
	kW	8.6	12.5	13.2	23.7
Sensible Heat Ratio (1)		81%	84%	87%	84%
EER (1)	(Btu/h)/W	11.5	11.0	11.5	10.3
	W/W	3.36	3.22	3.37	3.01
IEER	(Btu/h)/W	18.5	17.9	17.9	19.4
Max Cooling Capacity(2)	Btu/h	52800	58000	60500	113000
	kW	15.5	17.00	17.7	33.1
Max Sensible Capacity (2)	Btu/h	43600	47500	49500	91000
	kW	12.8	13.9	14.5	26.7
Min Cooling Capacity(3)	Btu/h	18800	38000	42500	32400
	kW	5.5	11.1	12.5	9.5
Min Sensible Capacity (3)	Btu/h	16200	33000	34800	30800
	kW	4.7	9.7	10.2	9.0
Free Cooling Capacity (4)	Btu	41,200	64,800	57,500	110,000
	kW	12.1	19.0	16.9	32.4
EER (4)	(Btu/h)/W	100.5	104.5	84.6	73.3
	W/W	29.5	30.6	24.8	21.5
Electric Heater					
Heating Capacity	Btu	17,000	17,000	17,000	17,000
	kW	5.0	5.0	5.0	5.0
Current	A	21.7	21.7	21.7	21.7
Compressor 1#					
Type		Scroll	Scroll	Scroll	Scroll
Qty	N.	1	1	1	1
Power Input (1)	kW	2.14	3.36	3.39	4.00
Current Input (1)	A	9.3	14.6	14.7	17.4
Power Input (2)	kW	4.3	5.0	5.5	5.15
Current Input (2)	A	18.7	21.7	23.9	22.4
Compressor 2#					
Type		/	/	/	Scroll
Qty	N.	/	/	/	1
Power Input (1)	kW	/	/	/	3.91
Current Input (1)	A	/	/	/	17.0
Evaporator Fan					
Type		EC Centrifugal Fan			
Qty	N.	2	2	2	2
Power Input(1)	kW	0.36	0.57	0.68	0.74
Current Input(1)	A	7.5	2.5	3.0	3.2
Air Volume(1)	CFM	1,410	2,410	2,290	3,470
	m³/h	2,400	4,100	3,900	5,900
Power Input(2)	kW	0.41	0.62	0.68	1.50
Current Input(2)	A	8.5	2.7	3.0	6.5
Air Volume(2)	CFM	1,640	2,580	2,290	4,410
	m³/h	2,800	4,400	3,900	7,500

Unit Model		UNI.11V1B3.DC	UNI.15V1T4.AC	UNI.15V1B4.AC	UNI.28V2B5.AC
Condenser Fan					
Type	N.	Axial Fan			
Qty	kW	1	1	1	2
Power Input(1)	A	0.64	0.67	0.41	0.71
Current Input(1)	CFM	2.8	2.9	1.8	3.1
Air Volume(1)	m ³ /h	3,700	4,880	4,580	7,940
	kW	6,300	8,300	7,800	13,500
Power Input(2)	A	0.64	0.67	0.43	1.50
Current Input(2)	CFM	2.8	2.9	1.8	6.5
Air Volume(2)	m ³ /h	3,700	4,880	4,580	10,000
		6,300	8,300	7,800	17,000
Refrigerant					
Type		R410A			
Qty 1#	kg	4.0	5.6	4.6	5.7
	oz	141.1	197.5	162.2	201.0
Qty 2#	kg	/	/	/	5.9
	oz	/	/	/	208.1
Air Filter					
Preliminary Air Filter (G2)	in	35.8*11.8*0.4	38.6*11.8*0.4	43.7*11.8*0.4	21.2*18.5*0.4
	n.	1	1	1	2
Main Air Filter (G4)	in	15.5*15.5*1.8	19.9*17.9*3.8	19.5*17.5*1.8	15.5*23.5*3.8
	n.	2	2	2	3
Dimensions					
Width	in	45 5/8	53 3/8	53 1/2	57 1/2
	mm	1159	1355	1359	1460
Depth	in	27 1/2	35 7/8	31 1/4	41 1/2
	mm	698	912	794	1055
Height	in	84 9/16	92 15/16	83 3/8	93 1/2
	mm	2148	2360	2118	2375
Width (Package)	in	46 11/16	54 8/16	54 8/16	58 8/16
	mm	1186	1384	1384	1486
Depth (Package)	in	29 8/16	38 8/16	33 8/16	44 8/16
	mm	720	940	818	1130
Height (Package)	in	89 12/16	98	89 12/16	98 13/16
	mm	2280	2490	2280	2510
Weight					
Weight	lbs	633	858	838	1393
	kg	287	390	380	632
Weight (With Packaging)	lbs	686	924	904	1459
	kg	311	420	410	662

- (1) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Rated Capacity.
- (2) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Max Capacity.
- (3) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Min Capacity.
- (4) Optional function. Measured at DT (Tinside-Toutside) = 21.6°F (-6°C).

Unit Model		UNI.15V1B4.AC	UNI.28V1B5.AC	UNI.15V1B4.AC	UNI.28V1B5.AC
Air Flow		DL	DL	DL	DL
Power Supply					
Power Source		230V/3PH/60Hz		460V/3PH/60Hz	
Max Input Power	kW	11.8	18.9	17.4	22.8
Rated Power 1#	kW	4.46	8.35	4.59	8.51
Rated Current 1#	A	12.7	24.0	7.3	10.7
Rated Power 2#	kW	/	/	/	/
Rated Current 2#	A	/	/	/	/
Mca 1#	A	21.8	23.9	12.6	24.6
Mop 1#	A	30	25	15	35
Mca 2#	A	/	43.7	/	/
Mop 2#	A	/	70	/	/
Performance					
Total Capacity (1)	Btu/h	51,500	96,000	52,500	96,000
	kW	15.1	28.1	15.4	28.1
Sensible Capacity (1)	Btu/h	41,000	79,500	42,500	80,000
	kW	12.0	23.3	12.5	23.4
Sensible Heat Ratio (1)		80%	83%	81%	83%
EER (1)	(Btu/h)/W	11.5	11.5	11.4	11.0
	W/W	3.38	3.37	3.35	3.23
IEER	(Btu/h)/W	18.4	19.4	18.4	19.4
Max Cooling Capacity(2)	Btu/h	64500	133000	64000	127000
	kW	18.9	39.0	18.8	37.2
Max Sensible Capacity (2)	Btu/h	49500	97000	49000	105000
	kW	14.5	28.4	14.4	30.8
Min Cooling Capacity(3)	Btu/h	30000	56000	27600	55500
	kW	8.8	16.4	8.1	16.3
Min Sensible Capacity (3)	Btu/h	21400	42500	19800	48000
	kW	6.3	12.5	5.8	14.1
Free Cooling Capacity (4)	Btu	58,000	110,000	60,000	118,000
	kW	17.3	32.4	17.7	34.8
EER (4)	(Btu/h)/W	93.5	73.3	93.2	47.0
	W/W	27.4	21.5	27.3	13.8
Electric Heater					
Heating Capacity	Btu	17,000	17,000	17,000	17,000
	kW	5.0	5.0	5.0	5.0
Current	A	12.6	12.6	6.3	6.3
Compressor 1#					
Type		Scroll	Scroll	Scroll	Scroll
Qty	N.	1	1	1	1
Power Input (1)	kW	3.63	6.70	3.75	7.02
Current Input (1)	A	9.1	16.8	4.7	8.8
Power Input (2)	kW	5.15	13.94	5.0	11.2
Current Input (2)	A	12.9	35.0	6.3	14.1
Compressor 2#					
Type		/	/	/	/
Qty	N.	/	/	/	/
Power Input (1)	kW	/	/	/	/
Current Input (1)	A	/	/	/	/
Evaporator Fan					
Type		EC Centrifugal Fan			
Qty	N.	2	2	2	2
Power Input(1)	kW	0.42	1.06	0.49	0.85
Current Input(1)	A	1.8	4.6	2.1	1.1
Air Volume(1)	CFM	2,000	4,050	2,170	3,640
	m³/h	3,400	6,900	3,700	6,200
Power Input(2)	kW	0.62	1.50	0.64	2.51
Current Input(2)	A	2.7	6.5	2.8	3.2
Air Volume(2)	CFM	2,350	4,410	2,410	4,730
	m³/h	4,000	7,500	4,100	8,050

Unit Model		UNI.15V1B4.AC	UNI.28V1B5.AC	UNI.15V1B4.AC	UNI.28V1B5.AC
Condenser Fan					
Type		Axial Fan			
Qty	N.	1	2	1	2
Power Input(1)	kW	0.41	0.59	0.35	0.64
Current Input(1)	A	1.8	2.6	0.4	0.8
Air Volume(1)	CFM	4,580	5,880	4,580	7,050
	m³/h	7,800	10,000	7,800	12,000
Power Input(2)	kW	0.41	1.50	0.79	1.96
Current Input(2)	A	1.8	6.5	1.0	2.5
Air Volume(2)	CFM	4,580	10,000	4,940	10,000
	m³/h	7,800	17,000	8,400	17,000
Refrigerant					
Type		R410A			
Qty 1#	kg	4.6	15.0	4.6	15.0
	oz	162.2	529.1	162.2	529.1
Qty 2#	kg	/	/	/	/
	oz	/	/	/	/
Air Filter					
Preliminary Air Filter (G2)	in	43.7"11.8"0.4	21.2"18.5"0.4	43.7"11.8"0.4	21.2"18.5"0.4
	n.	1	2	1	2
Main Air Filter (G4)	in	19.5"17.5"1.8	23.4"23.4"3.8	19.5"17.5"1.8	23.4"23.4"3.8
	n.	2	2	2	2
Dimensions					
Width	in	53 1/2	57 1/2	53 1/2	57 1/2
	mm	1359	1460	1359	1460
Depth	in	31 1/4	41 9/16	31 1/4	41 9/16
	mm	794	1055	794	1055
Height	in	83 3/8	93 1/2	83 3/8	93 1/2
	mm	2118	2375	2118	2375
Width (Package)	in	54 1/2	58 1/2	54 1/2	58 1/2
	mm	1384	1486	1384	1486
Depth (Package)	in	33 1/2	44 1/2	33 1/2	44 1/2
	mm	818	1130	818	1130
Height (Package)	in	89 3/4	98 13/16	89 3/4	98 13/16
	mm	2280	2510	2280	2510
Weight					
Weight	lbs	838	1300	838	1300
	kg	380	590	380	590
Weight (With Packaging)	lbs	904	1367	904	1367
	kg	410	620	410	620

- (1) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Rated Capacity.
- (2) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Max Capacity.
- (3) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Min Capacity.
- (4) Optional function. Measured at DT (Tinside-Toutside) = 21.6°F (-6°C).

Unit Specification

50Hz

Unit Model		UNI.7V1B2	UNI.11V1T3	UNI.11V1B3	UNI.15V1T4	UNI.15V1B4	UNI.28V2B5
Air Flow		DL	O	DL	O	DL	DL
Power Supply							
Power Source		220V/1PH/50Hz					
Max Input Power	kW	5.6	5.6	5.6	7.9	7.6	15.7
Rated Power 1#	kW	2.17	3.09	3.06	4.60	4.55	4.73
Rated Current 1#	A	9.4	13.4	13.3	20.0	19.8	20.5
Rated Power 2#	kW	/	/	/	/	/	4.64
Rated Current 2#	A	/	/	/	/	/	20.2
Mca 1#	A	28.7	29.3	29.0	34.2	36.8	36.1
Mop 1#	A	30	45	45	50	60	50
Mca 2#	A	/	/	/	/	/	29.4
Mop 2#	A	/	/	/	/	/	40
Performance							
Total Capacity (1)	Btu/h	24,600	34,800	35,200	50,500	51,500	96,000
	kW	7.2	10.2	10.3	14.8	15.1	28.1
Sensible Capacity (1)	Btu/h	20,600	29,000	29,000	42,500	45,000	81,000
	kW	6.0	8.5	8.5	12.5	13.2	23.7
Sensible Heat Ratio (1)		84%	83%	82%	84%	87%	84%
EER (1)	(Btu/h)/W	11.3	11.3	11.5	11.0	11.3	10.3
	W/W	3.32	3.30	3.37	3.22	3.32	3.01
IEER	(Btu/h)/W	17.0	18.5	18.5	17.0	17.0	18.5
Max Cooling Capacity(2)	Btu/h	30,400	48,000	48,000	58,000	60,500	113,000
	kW	8.9	14.1	14.1	17.0	17.7	33.1
Max Sensible Capacity (2)	Btu/h	25,400	35,400	35,200	47,500	49,500	91,000
	kW	7.4	10.4	10.3	13.9	14.5	26.7
Min Cooling Capacity(3)	Btu/h	12,200	24,000	25,600	38,000	42,500	32,400
	kW	3.6	7.0	7.5	11.1	12.5	9.5
Min Sensible Capacity (3)	Btu/h	8,800	22,800	22,000	33,000	34,800	30,800
	kW	2.6	6.7	6.4	9.7	10.2	9.0
Free Cooling Capacity (4)	Btu	31,000	41,200	36,800	64,800	57,500	110,000
	kW	9.1	12.1	10.8	19.0	16.9	32.4
EER (4)	(Btu/h)/W	110.7	105.6	108.2	104.5	84.6	73.3
	W/W	32.4	31.0	31.7	30.6	24.8	21.5
Electric Heater							
Heating Capacity	Btu	17,000	17,000	17,000	17,000	17,000	17,000
	kW	5.0	5.0	5.0	5.0	5.0	5.0
Current	A	21.7	21.7	21.7	21.7	21.7	21.7
Compressor 1#							
Type		Rotary	Scroll	Scroll	Scroll	Scroll	Scroll
Qty	N.	1	1	1	1	1	1
Power Input (1)	kW	1.78	2.31	2.21	3.36	3.51	4.00
Current Input (1)	A	7.7	10.0	9.6	14.6	15.3	17.4
Power Input (2)	kW	2.15	4.31	4.35	5.0	5.73	5.15
Current Input (2)	A	9.3	18.7	18.9	21.7	24.9	22.4
Compressor 2#							
Type		/	/	/	/	/	Scroll
Qty	N.	/	/	/	/	/	1
Power Input (1)	kW	/	/	/	/	/	3.91
Current Input (1)	A	/	/	/	/	/	17.00
Evaporator Fan							
Type		EC Centrifugal Fan					
Qty	N.	1	1	1	1	1	2
Power Input(1)	kW	0.18	0.39	0.34	0.57	0.68	0.74
Current Input(1)	A	0.8	1.7	1.5	2.5	3.0	3.2
Air Volume(1)	CFM	1,080	1,640	1,470	2,410	2,290	3,470
	m³/h	1844	2,800	2,500	4,100	3,900	5,900
Power Input(2)	kW	0.28	0.39	0.34	0.62	0.68	1.50

Unit Model		UNI.7V1B2	UNI.11V1T3	UNI.11V1B3	UNI.15V1T4	UNI.15V1B4	UNI.28V2B5
Current Input(2)	A	1.2	1.7	1.5	2.7	3.0	6.5
	CFM	1,230	1,640	1,470	2,580	2,290	4,410
Air Volume(2)	m³/h	2104	2,800	2,500	4,400	3,900	7,500
Condenser Fan							
Type		Axial Fan					
Qty	N.	1	1	1	1	1	2
Power Input(1)	kW	0.21	0.39	0.51	0.67	0.36	0.71
Current Input(1)	A	0.9	1.7	2.2	2.9	1.6	3.1
Air Volume(1)	CFM	1,880	3,470	3,240	4,880	3,820	7,940
	m³/h	3200	5,900	5,500	8,300	6,500	13,500
Power Input(2)	kW	0.21	0.39	0.51	0.67	0.36	1.50
Current Input(2)	A	0.9	1.7	2.2	2.9	1.6	6.5
Air Volume(2)	CFM	1,880	3,470	3,240	4,880	3,820	10,000
	m³/h	3200	5,900	5,500	8,300	6,500	17,000
Refrigerant							
Type		R410A					
Qty 1#	kg	3.1	5.3	3.7	5.6	4.6	5.7
	oz	109.3	186.9	130.5	197.5	162.2	201.0
Qty 2#	kg	/	/	/	/	/	5.9
	oz	/	/	/	/	/	208.1
Air Filter							
Preliminary Air Filter (G2)	in	29.9*11.8*0.4	30.1*11.8*0.4	35.8*11.8*0.4	38.6*11.8*0.4	43.7*11.8*0.4	21.2*18.5*0.4
	n.	1	1	1	1	1	2
Main Air Filter (G4)	in	17.5**24.5**1.8"	15.9**15.9**3.8"	15.5*15.5*1.8	19.9*17.9*3.8	19.5*17.5*1.8	15.5*23.5*3.8
	n.	1	2	2	2	2	3
Dimensions							
Width	in	39 3/4	44 7/8	45 5/8	53 3/8	53 1/2	57 1/2
	mm	1010	1141	1159	1355	1359	1460
Depth	in	27 8/16	26 13/16	27 1/2	35 15/16	31 1/4	41 9/16
	mm	698	680	698	912	794	1055
Height	in	84	92 7/8	84 9/16	92 15/16	83 3/8	93 1/2
	mm	2134	2360	2148	2360	2118	2375
Width (Package)	in	40 13/16	47 1/4	46 11/16	54 1/2	54 1/2	58 1/2
	mm	1036	1200	1186	1384	1384	1486
Depth (Package)	in	28 1/4	30 5/16	29 1/2	38 1/2	33 1/2	44 1/2
	mm	718	740	720	940	818	1130
Height (Package)	in	89 3/4	98 1/16	89 3/4	98	89 3/4	98 13/16
	mm	2280	2490	2280	2490	2280	2510
Weight							
Weight	lbs	504	646	633	858	838	1393
	kg	229	293	287	390	380	632
Weight (With Packaging)	lbs	558	690	686	924	904	1459
	kg	253	313	311	420	410	662

(1) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Rated Capacity.

(2) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Max Capacity.

(3) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Min Capacity.

(4) Optional function. Measured at DT (Tinside-Toutside) = 21.6°F (-6°C).

Unit Model		UNI.15V1B4.AC	UNI.28V1B5.AC
Air Flow		DL	O
Power Supply			
Power Source		400V/3PH/50Hz	
Max Input Power	kW	15.1	20.3
Rated Power 1#	kW	4.65	8.76
Rated Current 1#	A	8.2	12.6
Rated Power 2#	kW	/	/
Rated Current 2#	A	/	/
Mca 1#	A	14.5	26.2
Mop 1#	A	20	40
Mca 2#	A	/	/
Mop 2#	A	/	/
Performance			
Total Capacity (1)	Btu/h	51,500	96,000
	kW	15.1	28.1
Sensible Capacity (1)	Btu/h	41,000	80,000
	kW	12.0	23.4
Sensible Heat Ratio (1)		80%	83%
EER (1)	(Btu/h)/W	11.1	11.0
	W/W	3.25	3.21
IEER	(Btu/h)/W	18.4	19.4
	Btu/h	59700	121500
Max Cooling Capacity(2)	kW	17.5	35.6
	Btu/h	40600	103500
Max Sensible Capacity (2)	kW	11.9	30.3
	Btu/h	27000	39900
Min Cooling Capacity(3)	kW	7.9	11.7
	Btu/h	18800	36500
Min Sensible Capacity (3)	kW	5.5	10.7
	Btu/h	58,000	137,000
Free Cooling Capacity (4)	kW	17.3	40.2
	(Btu/h)/W	82.9	72.1
EER (4)	W/W	24.3	21.1
Electric Heater			
Heating Capacity	Btu	17,000	17,000
	kW	5.0	5.0
Current	A	7.2	7.2
Compressor 1#			
Type		Scroll	Scroll
Qty	N.	1	1
Power Input (1)	kW	3.85	7.06
Current Input (1)	A	5.6	10.2
Power Input (2)	kW	5.5	11.5
Current Input (2)	A	7.9	16.6
Compressor 2#			
Type		/	/
Qty	N.	/	/
Power Input (1)	kW	/	/
Current Input (1)	A	/	/
Compressor Inverter			
Shutdown Current	A	26.0	35.0
Evaporator Fan			
Type		EC Centrifugal Fan	
Qty	N.	2	2
Power Input(1)	kW	0.50	1.05
Current Input(1)	A	2.2	1.5
Air Volume(1)	CFM	1,640	4,050
	m³/h	2,800	6,900

Unit Model		UNI.15V1B4.AC	UNI.28V1B5.AC
Power Input(2)	kW	0.70	1.90
Current Input(2)	A	3.0	2.7
Air Volume(2)	CFM	2,350	5,470
	m ³ /h	4,000	9,300
Condenser Fan			
Type		Axial Fan	
Qty	N.	1	2
Power Input(1)	kW	0.30	0.65
Current Input(1)	A	0.4	0.9
Air Volume(1)	CFM	4,410	7,050
	m ³ /h	7,500	12,000
Power Input(2)	kW	0.5	1.12
Current Input(2)	A	0.7	1.6
Air Volume(2)	CFM	4,940	10,000
	m ³ /h	8,400	17,000
Refrigerant			
Type		R410A	
Qty 1#	kg	4.6	15.0
	oz	162.2	529.1
Qty 2#	kg	/	/
	oz	/	/
Air Filter			
Preliminary Air Filter (G2)	in	43.7*11.8*0.4	21.2*18.5*0.4
	n.	1	2
Main Air Filter (G4)	in	19.5*17.5*1.8	23.4*23.4*3.8
	n.	2	2
Dimensions			
Width	in	53 1/2	57 1/2
	mm	1359	1460
Depth	in	31 1/4	41 9/16
	mm	794	1055
Height	in	83 6/16	93 1/2
	mm	2118	2375
Width (Package)	in	54 1/2	58 1/2
	mm	1384	1486
Depth (Package)	in	33 1/2	44 1/2
	mm	818	1130
Height (Package)	in	89 3/4	98 13/16
	mm	2280	2510
Weight			
Weight	lbs	838	1300
	kg	380	590
Weight (With Packaging)	lbs	904	1367
	kg	410	620

(1) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Rated Capacity.


(2) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Max Capacity.

(3) Cooling rated at 95°F (35°C) outdoor and 80°/67°F (26.7°C/19.4°C) indoor Min Capacity.

(4) Optional function. Measured at DT (Tinside-Toutside) = 21.6°F (-6°C).


Unit Dimension Drawing

B2/B3/B4

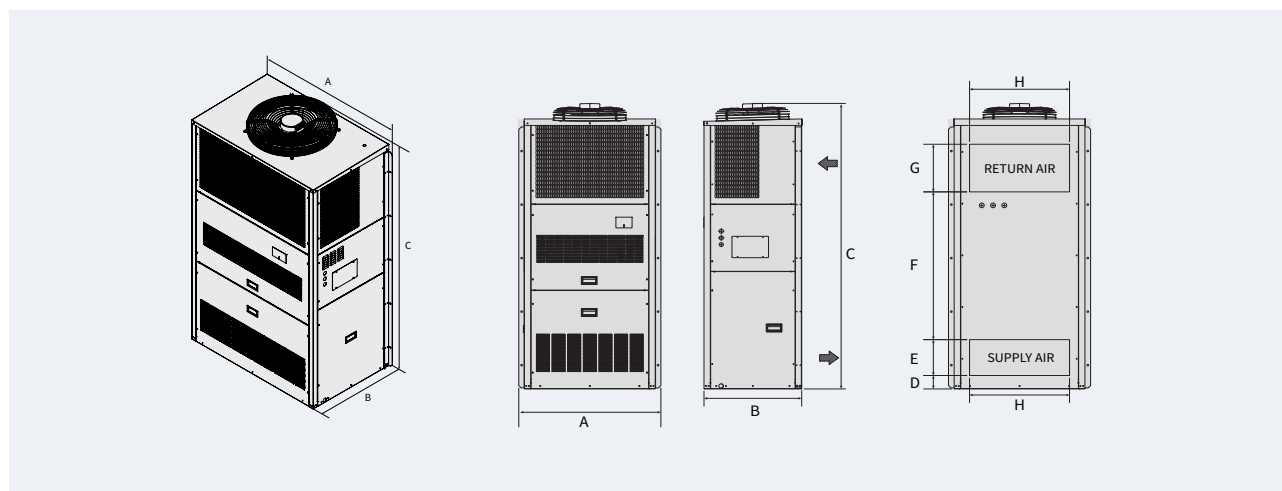

Model	UNI.7V1B2		UNI.11V1B3		UNI.15V1B4	
	mm	in	mm	in	mm	in
A	1,010	39 3/4	1,159	45 5/8	1,359	53 1/2
B	698	27 8/16	698	27 1/2	794	31 1/4
C	2,134	84	2,148	84 9/16	2,118	83 3/8
D	101	4	101	4	101	4
E	268	10 9/16	268	10 9/16	268	10 9/16
F	1,104	43 7/16	1,104	43 7/16	1,104	43 7/16
G	356	14	356	14	356	14
H	710	27 15/16	762	30	880	34 5/8


B5

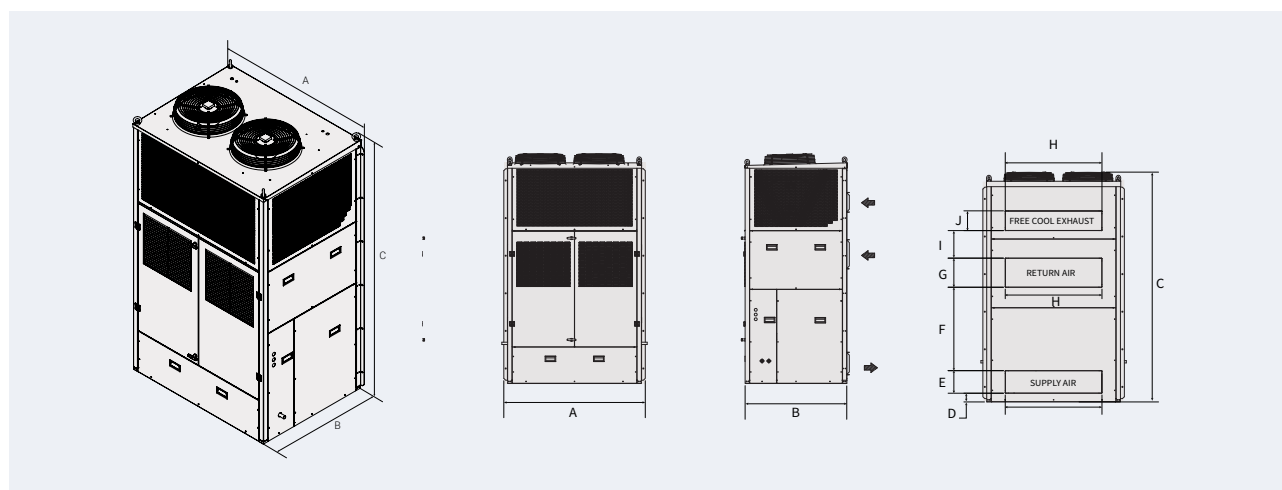

Model	UNI.28V1B5	
	mm	in
A	1,460	57 1/2
B	1,055	41 9/16
C	2,375	93 1/2
D	92.8	3 5/8
E	240	9 7/16
F	887	34 15/16
G	310	12 3/16
H	998	39 5/16
I	293	11 9/16
J	210	8 1/4


Unit Dimension Drawing

T3/T4

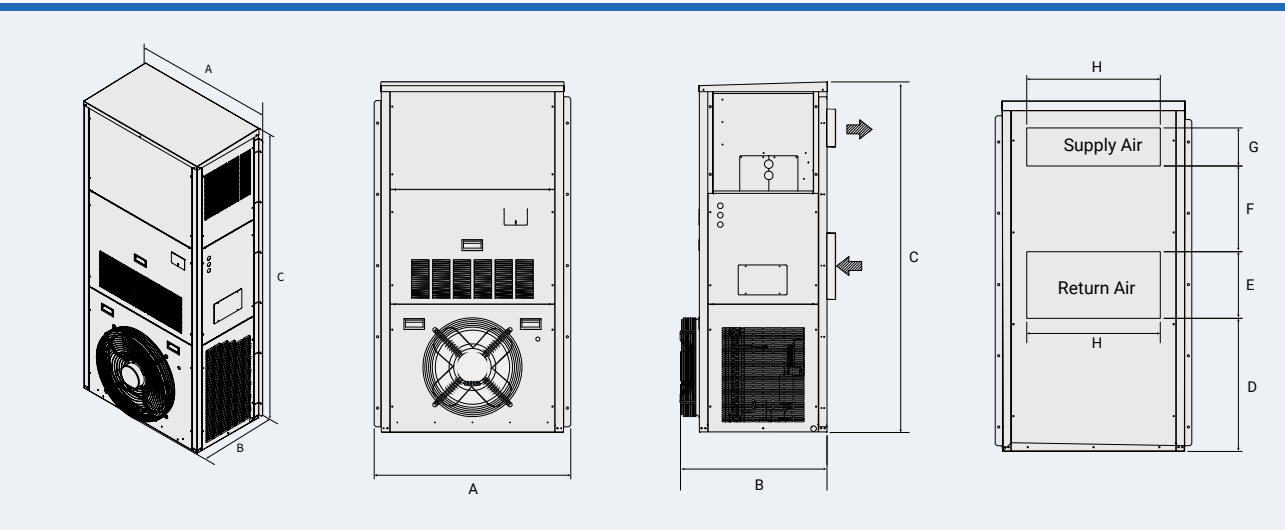

Model	UNI.11V1T3		UNI.15V1T4	
	mm	in	mm	in
A	1,141	44 7/8	1,355	53 3/8
B	680	44 7/8	969	38 1/8
C	2,360	92 7/8	2,360	92 15/16
D	882	34 3/4	885	34 13/16
E	398	15 11/16	398	15 11/16
F	768	30 1/4	768	30 1/4
G	246	9 11/16	246	9 11/16
H	756	29 3/4	756	29 3/4

Controller Box

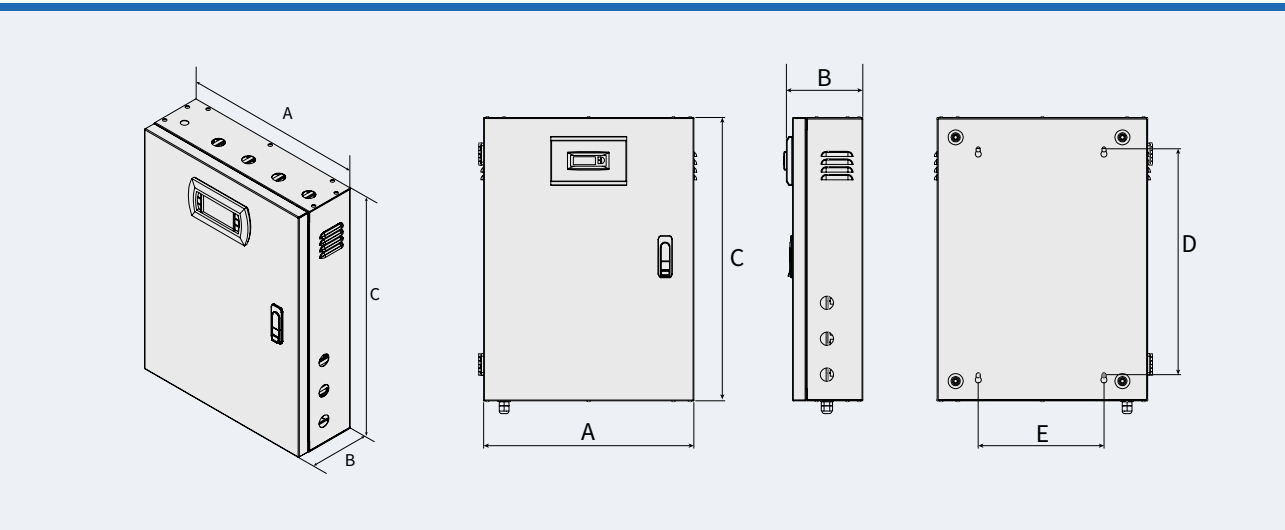

Controller Box Size	A	B	C	D	E
mm	410	148	552	440	245
in	16 1/8	5 13/16	21 3/4	17 5/16	9 5/8



AIRSYS

Headquarter

AIRSYS Cooling Technologies, Inc

Add: 7820 Reidville Rd. Greer, SC 29651, USA
Tel: +1 (855) 874 5380
Email: sales@air-sys.us

AIRSYS (UK) Ltd.

Add: 245 Europa Boulevard, Warrington, UK. WA5 7TN
Tel: +44 (0) 1925 377 272
Call Centre: +44(0)8456099950
Email: enquiries@air-sys.uk

AIRSYS Brasil Ltda.

Add: Av. Moaci, 395 Conj 35/36 04083-000 – Planalto Paulista SAO PAULO – SP
Tel: +55 (11) 25976817 / +55 (11) 21585560
Email: airsyst-brasil@air-sys.com.br

AIRSYS Deutschland GmbH

Add: Feringastr. 6, 85774 Unterföhring / München, Germany
Tel: +49 89 9921 6510
Email: anfragen@air-sys.eu

AIRSYS Refrigeration Engineering Technology (Beijing) Co., Ltd.

Add: 10th floor, Hongkun Shengtong building, 19, Ping Guo Yuan Xi Xiao Jie, Shijingshan, Beijing, China 100043
Tel: +86(0)10 68656161
Email: airsyst@air-sys.com

Gu'an AIRSYS Environment Technology Company Ltd.

Add: 25, Dongfang Street, Gu'an Industry Park, Langfang City, Hebei Province, China
Tel: +86(0)10 68656161

Shanghai AIRSERVE HVAC System Service Co., Ltd.

Add: Room 1701, Xinda building, No. 322 Xianxia Road, Changning District, Shanghai, China 200336
Tel: +86(0)21 62452626 Fax: +86 (0)21 6245962

AIRSYS Singapore Pte. Ltd

Add: 50, Tagore Lane Entrepreneur Centre, #03-04 (F), Singapore 787494
Tel: +65 64991850
Fax: +65 68416301
Email: sales@air-sys.sg

AIRSYS Philippines Corporation

Add: Unit 1205 12th Floor the Pearl Bank Centre Bldg., #146 Valero St. Salcedo Village, Bel-Air, City Of Makati, Fourth District, National Capital Region (Ncr), 1227, Philippines
Tel: +632 5310 1680
Email: sales@air-sys.sg

AIRSYS Malaysia Sdn. Bhd.

NO. 7-1, Jalan 109F, Plaza Danau 2, Taman Danau Desa, 58100 Kuala Lumpur Wilayah Persekutuan Malaysia
Tel: +60 3 7982 2010
Fax: +60 3 7980 1242
Email: sales@air-sys.sg

PT AIRSYS Technology Indonesia

Add: Prosperity Tower, Lt.2 Unit C Jl. Jend. Sudirman Kav. 52-53, RT.5/RW.3, Senayan Jakarta 12190
Tel: +62 855 1101 979
Email: sales@air-sys.sg

AIRSYS Australia Sales Office

Add: PO BOX 1088, Flagstaff Hill, SA, 5159, Australia
Tel: +61 479151080
Email: sales@air-sys.sg

Product design and specification subject to change without prior notice

AIRSYS

one
solution